

CALEX
HOLLAND

LUMINAIRES


OUTDOOR

UP AND DOWNLIGHT FLORENCE



User Manual

Art. No. 7002001000



$\varnothing: 5\text{mm}$



5 - 7 mm



Electro Cirkel Retail B.V.
Lyonstraat 29
3047 AJ Rotterdam
The Netherlands

Calex Smart Home UK Ltd.
20 Gresham Street London
EC2V 7JE United Kingdom


WWW.CALEX.EU

1




1


2

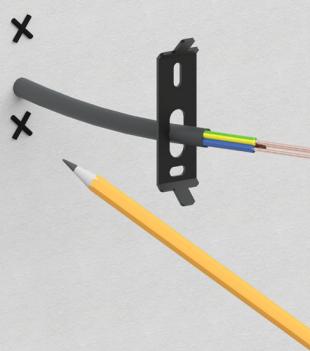

3

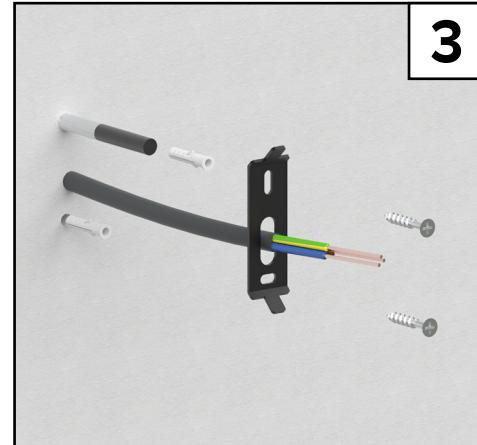


4

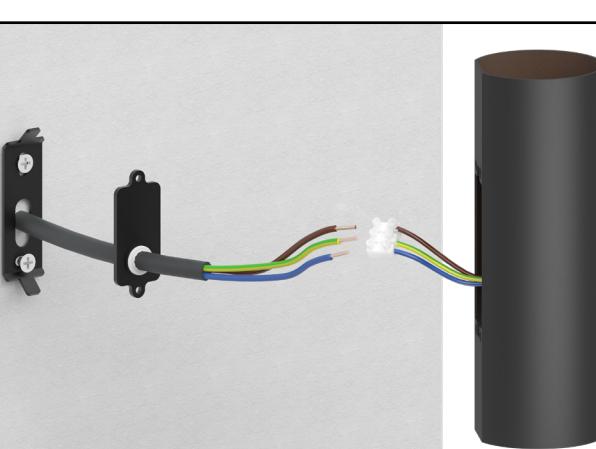

5



6

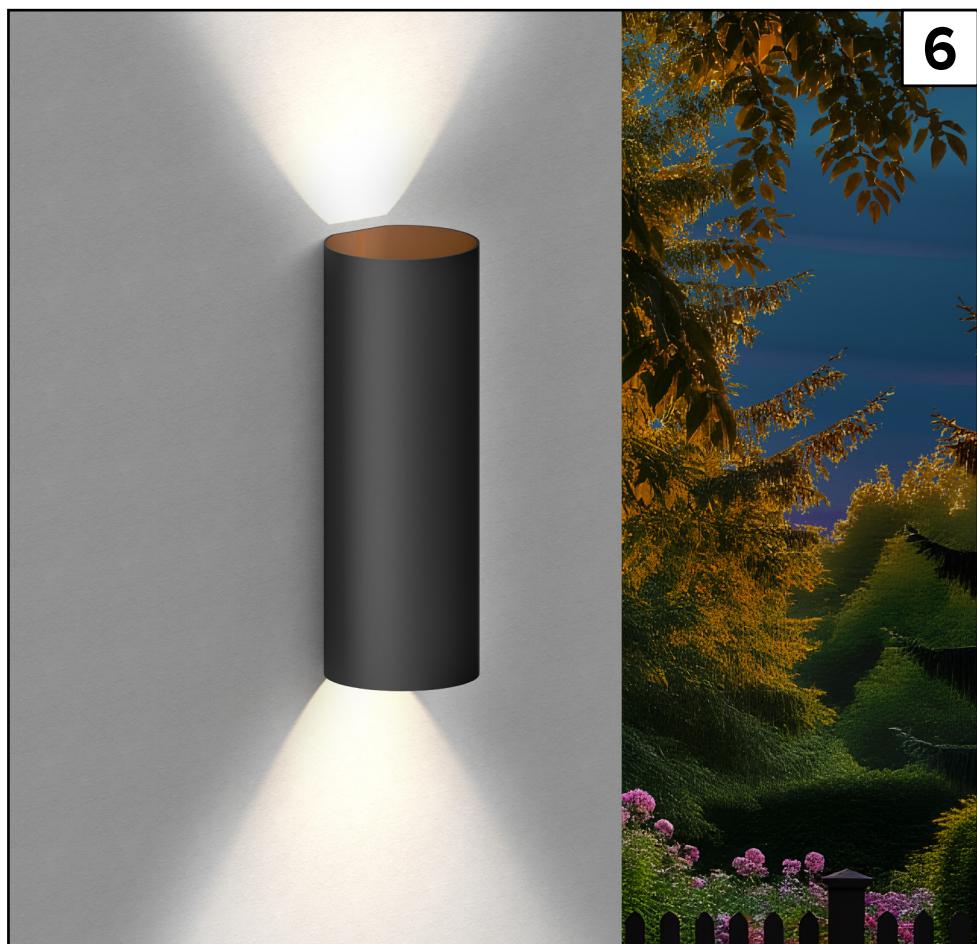

Installation and operation

Always ensure that the mains power supply is switched off before starting the installation.

1. Carefully take the up and downlight out of the package and check if all parts are present. Separate the wall bracket and the waterproof back plate from the up and downlight by unscrewing and removing the four screws.
2. Determine the place where you want to install the up and downlight. Mark the position of the drill holes by using the wall bracket as a template. Use a ruler to verify the distance between the marks.
3. Drill the holes and place the plugs. Attach the wall bracket with the two screws. Make sure that the earthed power cable is routed through the center opening of the bottom bracket.
4. Feed the power cable through the waterproof back plate and connect the three coloured wires to the corresponding connections.
5. Attach the waterproof back plate with the screws to ensure a watertight connection. Place the up and downlight over the wall bracket and secure it with the two screws using the supplied Allen key.
6. Switch on the mains power supply again and test the up and downlight for proper operation.

Safety



Conformity with all relevant requirements of the EU directive.

To disconnect power: switch group off in fusebox.

If applicable:

Use this device only for its intended purpose;

Do not use this device if it is damaged or defective.

Choose a location for the product where there is no risk of the cable being stepped on or tripped over. Do not place any objects on the cable.

If this product is damaged, especially if the cable or fitting is damaged, this product must be switched off immediately. In this case, replacement is required;

Before replacing it, turn off the power and let it cool down to avoid electric shock or burns.

The adapter (if applicable) must be installed near the unit, must not be connected to another adapter, and must be easily accessible.

Products should only be used with the original adapter.

This product should only be opened by a qualified technician if maintenance is required.

Never perform repairs yourself.

If this product is passed on to third parties, manuals must be included.



Choking hazard. Because packaging materials can be swallowed or misused, there is a risk of choking or injury. Keep packaging materials away from children.

Warranty

Any changes and/or modifications to the product will void the warranty. We cannot accept liability for damage caused by improper use of the product. Go to help.calex.eu for more information.

Disclaimer

Designs and specifications are subject to change without notice. All logos, brands and product references used are trademarks or registered trademarks of their respective holders and are hereby acknowledged as such.

Recycling



This product is labelled with this crossed out wheel bin symbol in accordance with European Directive 2012/19/EU to indicate that it must not be disposed of with your other household waste. Due to the presence of hazardous substances, mixtures or components, electrical and electronic devices that are not subject to selective sorting are potentially dangerous to the environment and human health. Please check your local city office or waste disposal service for the return and recycling of this product.

Explanation Safety Classes

- ⊕ Safety class I: Metal parts of equipment that fall into this class are connected to an earth protection conductor. If the product has a plug, it must be connected to an earthed socket; products that require installation are equipped with a ground terminal and must therefore be earthed; connect the ground wire (yellow green vein) to the ⊕-marked terminal.
- Safety Class II: This product or any part of it is double insulated and does not need to be connected to a grounded outlet.
- △ Safety Class III: Equipment in this group operates at an extra low voltage of less than 50 volts alternating current. For example, 24 volts.

The safety class is indicated on the product.

Explanation IP (Ingres Protection) Values

- IP20 Protected against solid objects greater than 12mm. No protection against liquids.
- IP44 Protected against solid objects greater than 1mm. Protection against vertical splashing water at an angle up to 60°.
- IP54 Prevents ingress of dust sufficient to cause harm. Protection against vertical splashing water at an angle up to 60°.
- IP65 Dust tight. No ingress of dust. Protected against powerful jets of water from all directions. Limited liquid entry.